



## CONTAINER # 60395 LID # 60396

### TECHNICAL DATA

**Capacity under lid:**  
3.70 L / 0.98 US gal.


**Wall thickness:**  
Container: 0.044 in.  
Lid: 0.035 in.

**Material:** Cont.: HDPE  
Lid: LDPE

**Thermal range:** -38°C (-36°F) to 82°C (180°F)

**Standard color:** white  
Other colors upon request

**Weight (approx.)**  
Container: 115 g (4.05 oz.)  
Lid: 38 g (1.34 oz.)

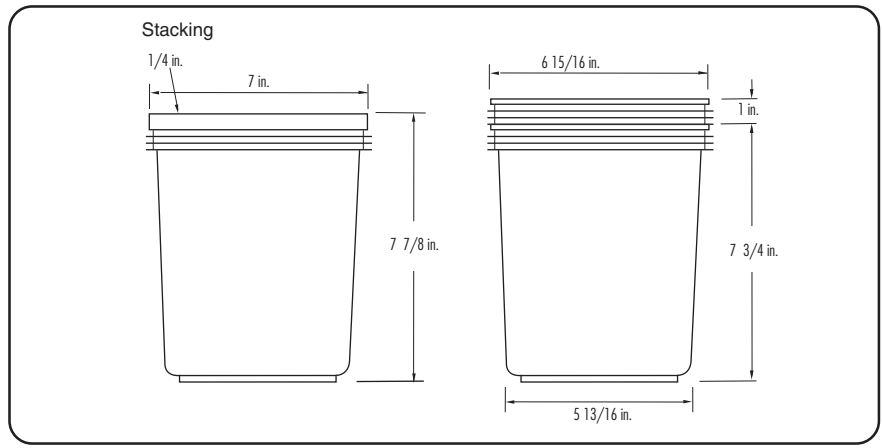


(Materials are recyclable or can be recovered for energy)

### PRINTING UP TO 6 colors, DRY OFFSET

### TOP LOADING RESISTANCE

**26 kg (57.3 lb)** at 23°C [73° F], 30 days. Product temperature when filling containers and warehouse temperature will affect container performance. IPL recommends to make necessary testing prior to full production.

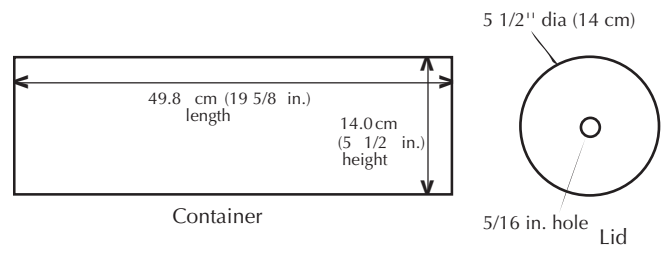

### PALLETIZATION OF FILLED CONTAINERS

To determine the number of containers you can stack according to the product packed, divide the top loading resistance by the total weight of one filled container. Take that number not rounded up and add the first unit

*PACKED IN BOXES*

*May vary according to your needs*

### OPENING AND CLOSING

**TO OPEN:** Lift edge of lid at any region to remove.

**TO CLOSE:** Snap the lid at any region, then follow all around while releasing air by pressing the center of the lid to burp container. If using a closing device, use proper burping pads.

Fillers, lid, container denesters and lidding devices are also available in a variety of combinations. Everything can be seen on brochures and video tape. Live demonstration on site can be done on demand.

### PACKAGING OF EMPTY CONTAINERS/LIDS

WAREHOUSING OF EMPTY CONTAINERS: 2 pallets high in warehousing

Approved by: *[Signature]*

**Approvals:** ..... Virgin materials are approved for food contact and meet FDA (Food and Drug Administration USA) and HPB (Health Protection Branch Canada) regulations.

**Advise:** ..... Handling conditions vary a lot from customer to customer, tests are recommended throughout the process of denesting, filling, conveying, palletization, warehousing, transportation and utilization by end users, etc. Specifications can be modified without notice. Please contact your IPL representative to confirm these data.

**Quality Assurance:** . IPL is ISO 9001 certified and quality procedures are documented in our quality system



**USA**  
IPL PRODUCTS, LTD.  
640 Lincoln Street  
Worcester, MA 01605  
Tel.:(508)351-6050 Fax.:(508)351-6044  
Toll free: 1-800-818-1318

**Canada**  
IPL INC.  
140 Commerciale  
St-Damien, QC  
Canada G0R 2Y0  
Tel : (418) 789-2880  
Fax : (418)789-3153  
Toll free: 1-800-463-0270 Ext. 299

Web Site  
[www.ipl-packaging.com](http://www.ipl-packaging.com)